


# **BETFRED**

**SECURITY  
FEATURES**



# Betfred Security Features - Safe

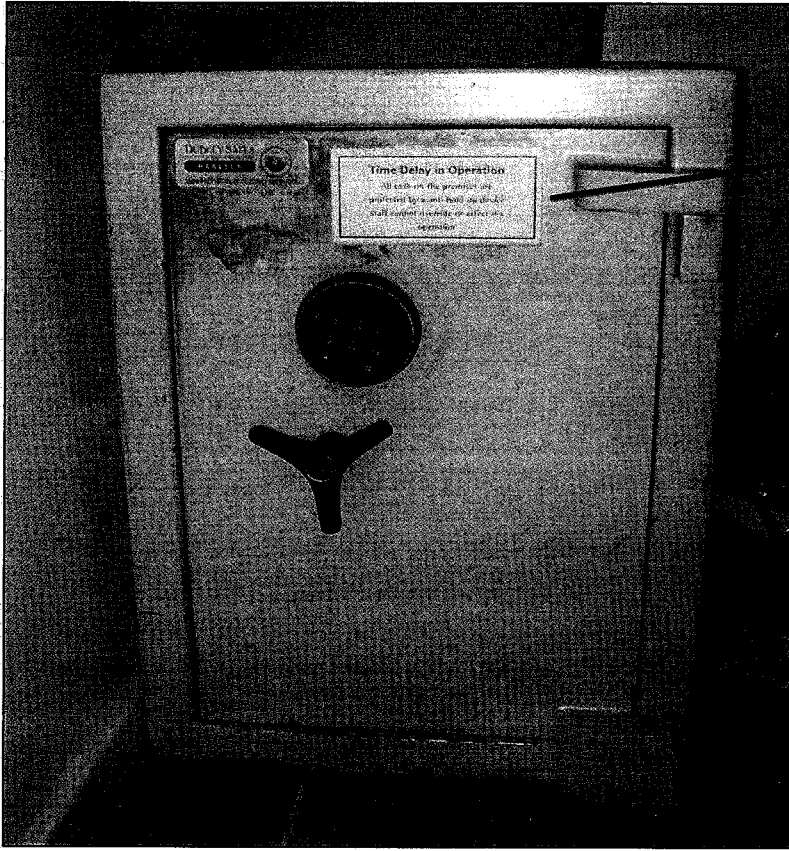


**Time Delay in Operation**  
All cash on the premises are protected by a anti hold up device staff cannot override or effect it's operation

**Chubb floor safe with 6 number digital combination.**

Time delay insert with 6 number digital combination including posting slot for bundles of notes. Maximum of £300 in coins kept in the main body of the safe.

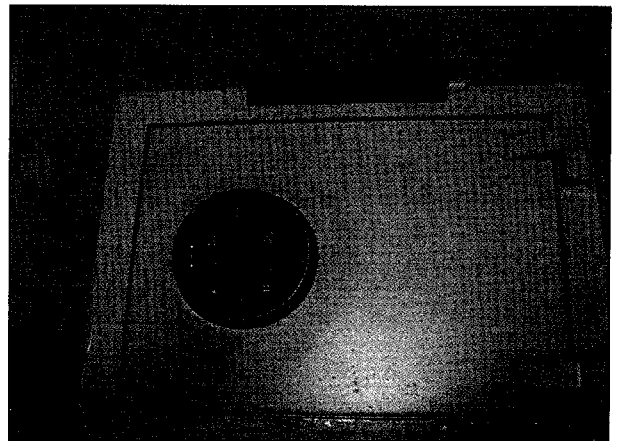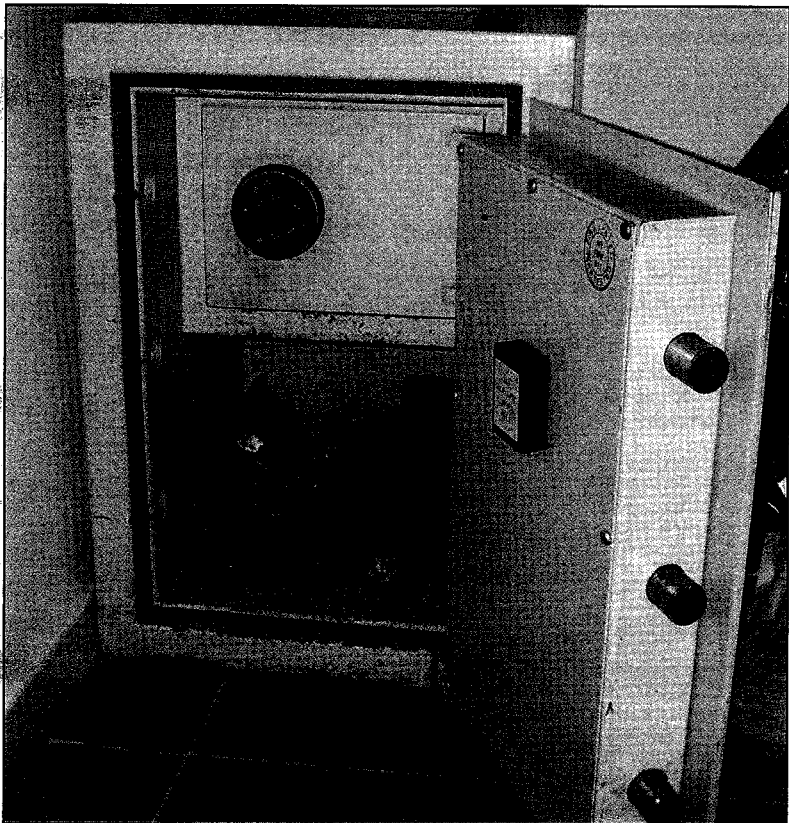

Innovative safe for  
combined burglary and  
fire protection

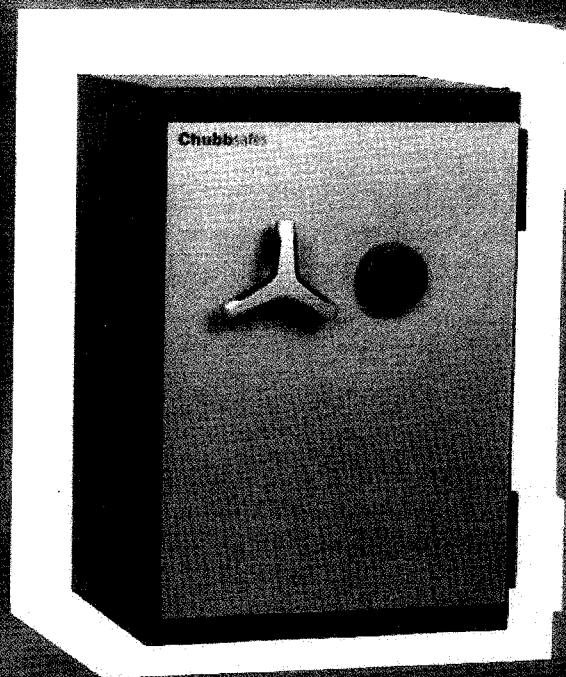

# Sovereign Elite

BURGLARY- & FIRE-RESISTANT PROTECTION

Burglary protection in accordance with the European standard, EN 1143-1, as certified by ECB-S for Grades 0 and I.

- Each grade corresponds to a higher insurance rating – £6 000 for Grade 0 and £10 000 for Grade I.
- Sovereign Elite as also been approved by ECB-S in accordance with EN 1047-1 in class S 60 P for one hour's fire protection of paper documents.
- The safe's new composite, torch-resistant barrier material – Dualite – ensures burglary and fire protection whilst also reducing its total weight. The low weight minimises transportation and installation costs.
- The three-way boltwork is constructed with solid steel bolts.
- For additional security, Sovereign Elite is fitted with an active relocker and anti-drilling plates have been

incorporated into the boltwork to withstand burglary attempts. The plates are specially designed and made with manganese-coated steel for Grade 0 and T200X carbide-clad steel for Grade I.

- A Class A mechanical key lock or a Class B high-security electronic lock, approved in accordance with EN 1300, are both available as primary lock options. Electronic locks increase the level of security and prevent unauthorised access to the safe.
- Every model can be customised with a range of internal fittings to maximise storage capacity.
- A data media insert is available, certified 60 Diskette by NT Fire 017, for one hour's fire protection of heat-sensitive data media.
- Sovereign Elite has a modern design with an ergonomic soft-touch handle.




**Chubb safes**  
*Trusted the world over.*

BURGLARY RESISTANCE  
EQUIPMENT

## Product Specifications

Model	External (mm)			Internal (mm)			Weight (kg)	Volume (litres)
	Height	Width	Depth	Height	Width	Depth		
40	435	500	456	335	400	395	90	40
60	530	500	521	430	400	380	115	62
110	690	600	561	590	500	386	161	114
150	875	600	561	775	500	386	198	150
200	1150	600	561	1050	500	386	243	203
300	1600	600	561	1500	500	386	322	290
350	1600	675	585	1500	575	410	352	354
450	1850	675	615	1750	575	440	415	443

### Lock Options



Electronic lock

As the primary locking option, Sovereign Elite safes can be fitted with either a high-security electronic lock (Class B) or a key lock (Class A).


Dual locking is available from model 110 and up. The primary lock can be complemented by a combination lock or both a key lock and electronic lock can be fitted.

All locks are tested by ECB-S and are certified in accordance with the EN 1300 standard.


Sovereign Elite's high-security electronic lock – certified Class B by ECB-S includes the following features:

- 1 master code, 1 supervisor code and 7 user codes.
- Time delay of up to 99 minutes between lock being operated and door being opened. Also equipped with time-delay override.
- Protective function to raise silent alarm if lock is being opened under duress.

### Internal Fittings




Shelf




Extendable shelf




Extendable drawer




Lockable compartment




Data media insert



Suspension file frame



Extendable tray



Shelf for hanging files (available for size 110 and above)

Authorised dealer

### Testing

#### Fire Testing

Sovereign Elite has been approved in accordance with the European standard, EN 1047-1 in fire class S 60 P, which means the safe will protect paper documents for one hour. This certification was awarded by ECB-S (European Certification Board-Security Systems).

#### Test Procedure

##### Stage 1

The cabinet is placed in a furnace and heated to a temperature of almost 1000°C for 60 minutes to simulate the effects of a severe fire.


##### Stage 2

The cabinet is removed from the furnace and cooled. When opened, the inner temperature of the cabinet must not exceed 150°C.

#### Burglary Testing

Sovereign Elite has been approved by ECB-S in accordance with the European standard, EN 1143-1, for burglary protection in Grades 0 and I.

A range of attack tools were used to test Sovereign Elite's level of resistance, from basic tools to sophisticated machinery such as oxyacetylene torches and thermal lances.




**Chubb safes**  
Trusted the world over.

[www.chubb safes.com](http://www.chubb safes.com)

\*Chubb\* is owned by Chubb plc and is a registered trademark used under license

# Betfred Security Features – Bandit Screen

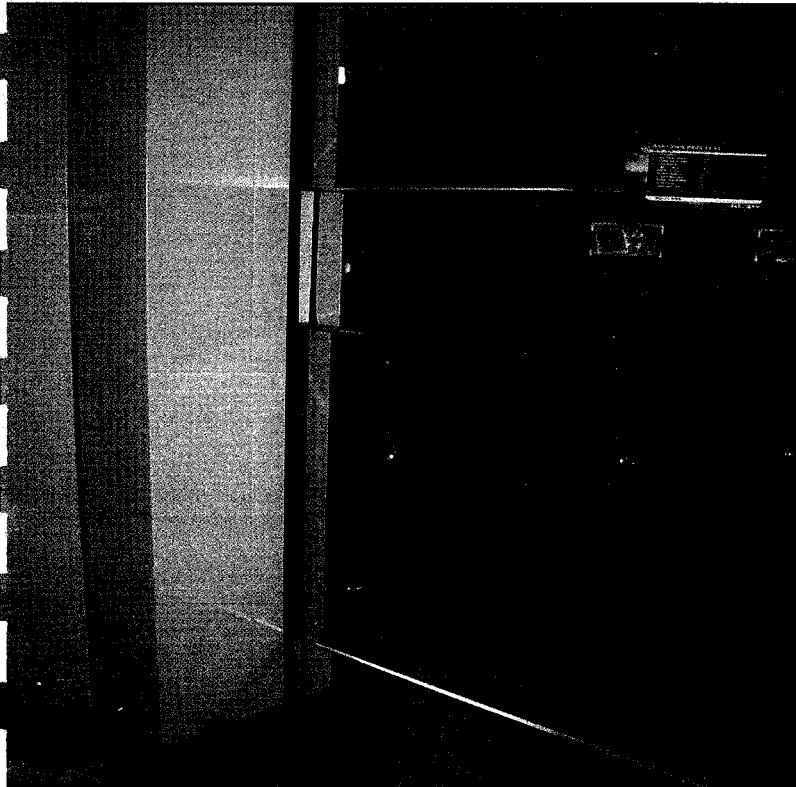

**Anti-Snatch Bandit Screens, showing small speech and service gaps.**

**Persons unable to reach over to snatch money or vault the counter.**

**Fitted with either toughened safety glass or polycarbonete.**

# Alphamet Maintenance Services Limited

Alphamet Maintenance  
Services Limited  
Unit 3-4 Alma Works  
Station Street  
Dukinfield  
Cheshire  
SK16 4SE

T: 0161 339 2921  
F: 0161 339 2375  
ams7@btconnect.com

For the attention of Ish-Betfred

Date: September 2010

Further to your recent enquiry our specification for anti bandit screen as requested.

**Specification Of Product:**

All aluminum extrusions are extruded using alloy 6063.T6 to BS1474:1987.

Profile to be used is Senior Aluminum Systems STW200 heavy duty series

All aluminum to be powder coated in standard ral color to comply with BS6496:1984

All glass used is to be 10.8 laminated security. Glazed with security beads sat on double sided heavy duty tape.

**Polycarbonate Sheet Spec**

10-years production experience

ISO-9001-2000.

Impact Resistance D-256....

*Erroll Phipps*

**Erroll Phipps**

# Betfred Security Features – CCTV

Covert pinhole CCTV camera


We are able to install 4, 8 or 12 camera CCTV systems.

Recordings are stored on a hard drive which is kept in a hidden location within the shop. These can be accessed remotely by the Security Manager or Head Office and burnt to as requested.


High quality still images can be printed off in the shop immediately.




# Betfred Security Features – Other Security Measures

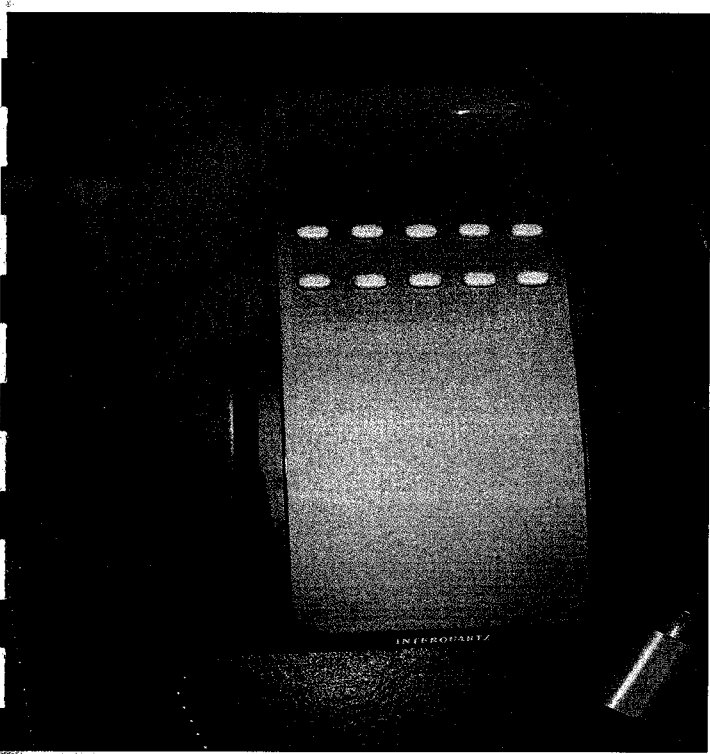


Emergency telephone with one button direct speed dial to police.

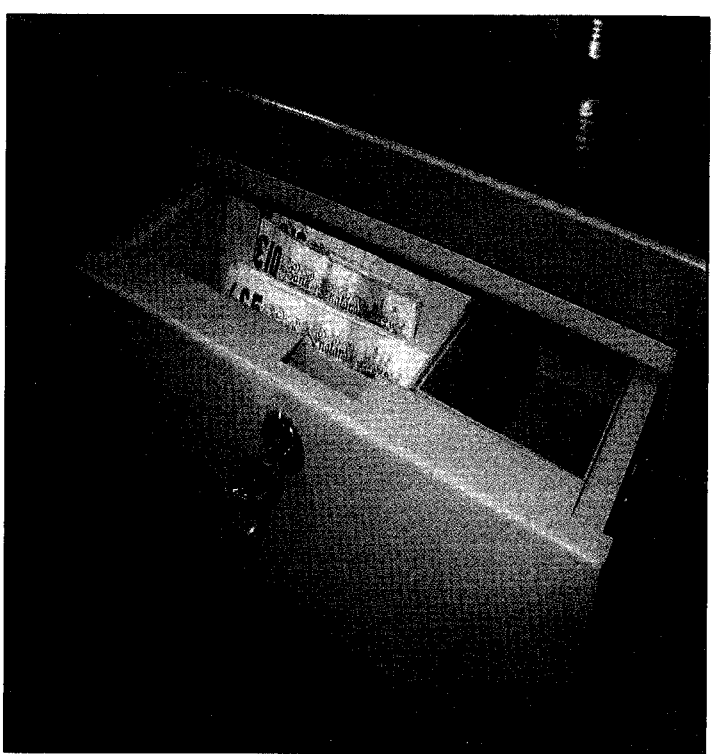

Lockable cash drawer.

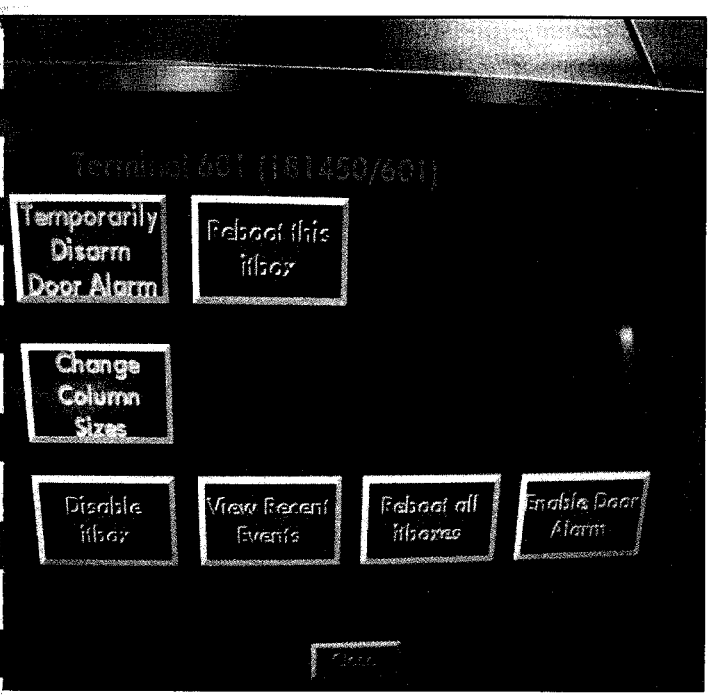


Fixed Odds Betting Terminals can be disabled from behind the counter.

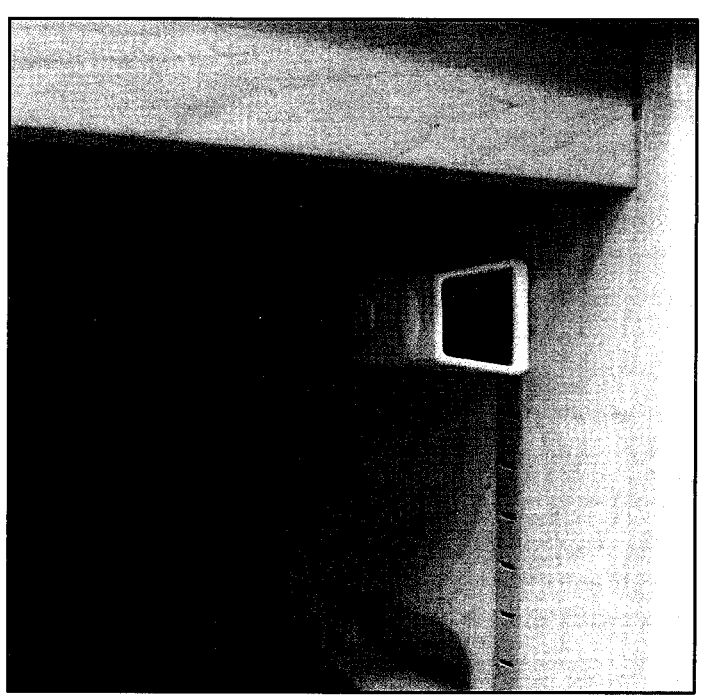

Panic alarm button linked to AMCO Alarm Surveillance and Response System.





# THE ALARM MONITORING COMPANY LTD

PO BOX 138, YORK, YO61 3WS

Tel 01347 822111 Fax 01347 824507

Email [info@alarm-monitoring.co.uk](mailto:info@alarm-monitoring.co.uk)

## Alarm & Emergency Response System Specification

Client - **Betfred New Shop** Installation number - / Monitoring Number - **105582**

Address - **70, The Broadway, , London, SW19 1RQ**

### GENERAL RESPONSE INFORMATION - (For operational details go to [www.alarm-monitoring.co.uk](http://www.alarm-monitoring.co.uk))

**System** = AMCO audio surveillance and emergency response system providing intruder detection and deterrence and immediate emergency support

**Normal response time** = less than 30 seconds

**Types of emergency support activated** = Police; Fire Service; Ambulance; Doctor

**Back-up support activated** = Keyholder response to Power failure; Keyholder and engineer response to system faults; Keyholder response to support all emergency calls.

### EQUIPMENT INSTALLED

#### **CENTRAL CONTROL PANEL - Type - R8++**

Description - Digitally operated and programmable panel with double pole, closed circuit wiring for all detectors with anti-tamper devices incorporated throughout. Conforming with BS4737 specification. Normal power is 240 volt mains supply backed up by a 12 v rechargeable battery capable of sustaining the panel for at least 8 hours in the event of power failure. Audio indication of setting and unsetting and visual display to give full indication of the status of the panel.

#### **DETECTION & EMERGENCY ACTIVATION EQUIPMENT - See attached "Alarm System Specification Sheet"**

#### **EXTERNAL DETERRENCE & WARNING - Type of "Bell" unit - D**

If fitted the siren is an external self-actuating electronic piezo sounder with built in xenon strobe fitted in a weatherproofed S.A.B. unit and all contained in a tough polycarbonate anti-tamper and anti-foam cover. Normal power is supplied by the central control panel but is backed up by an integral rechargeable battery. Automatic activation if wires are cut or system is tampered with. LED indicators where fitted provide maximum deterrence.

**Decoy box** - External siren box to provide deterrence where necessary.

**Warning Signs** - Warning that the property is monitored 24 hours a day with a £1,000 reward to provide maximum deterrence

#### **DIGITAL AUDIO COMMUNICATOR REMOTE SIGNALING DEVICE**

The digital communicator is a 5 channel audio communicator. If the alarm is activated the communicator immediately transmits a digitised audible alarm signal via the communication link listed below. Dialling continues for a maximum of 8 times to each number until a response is detected. Low battery warning is automatically signaled, with the system dialling out in the same way.

**Types of alarm that are monitored** = Intruder / Personal Attack / Fire / Medical Emergency / Power Fail

#### **AMCO ALARM SURVEILLANCE AND RESPONSE SYSTEM**

This is an interactive audio surveillance and immediate response system complying with ACPO policy for priority police response. The system is monitored 24 Hrs a day and provides immediate interrogation through a series of microphones and speakers. This interrogation provides immediate information regarding the occupants status and condition. Appropriate action is immediately commenced if intruder activity or an emergency is confirmed :-

a) If an intruder or attacker is detected, the police are immediately called, whilst warning is given over a loud speaker with the express purpose of expediting the intruders removal from the premises.

b) If a medical or fire emergency, the appropriate emergency service is summoned immediately and the occupants given verbal assistance.

**Type of AMCO system fitted** = AF3 with 1 Speaker/Microphones fitted.

#### **COMMUNICATION LINKS**

1. Standard - via secure conventional terrestrial phone lines with special line cut monitoring of vulnerable lines on site.

2. High Security - Standard telephone links backed up by a secreted audio GSM link that provides immediate notification of telephone line cuts and corresponding key holder response whilst continuing to provide the standard AMCO alarm surveillance and immediate audio response as above.

**Date :-** 11/08/10

## Betfred Security Features – Other Security Measures



Maglock fitted to front entrance

Access to the customer toilets is controlled, the toilets are locked with the key kept behind the counter.

Fixed Odds Betting Terminals are located near to the counter for supervision.